

Wellhead Oil Recovery

Medium and high-end wellhead equipment and manifolds

Reference standards: API 6A, ISO10423, GB/T22513 and NACE 0175

This product is mainly used in productivity testing, acidizing, fracturing, well completion, gas production and other working conditions.

Product Features

Consisting of multiple large-diameter fracturing gate valves, fracturing heads, and unions


Maximum diameter of 7-1/16 "and maximum pressure of 15,000 psi

Fracturing head designed with compact structure, small size and light weight for easy installation

Used for high-pressure and large-diameter manual valves, and designed with a ball screw structure to reduce switching torque

Compact design to greatly reduce ground area and height

Stable and reliable in long-term use, with a long service life

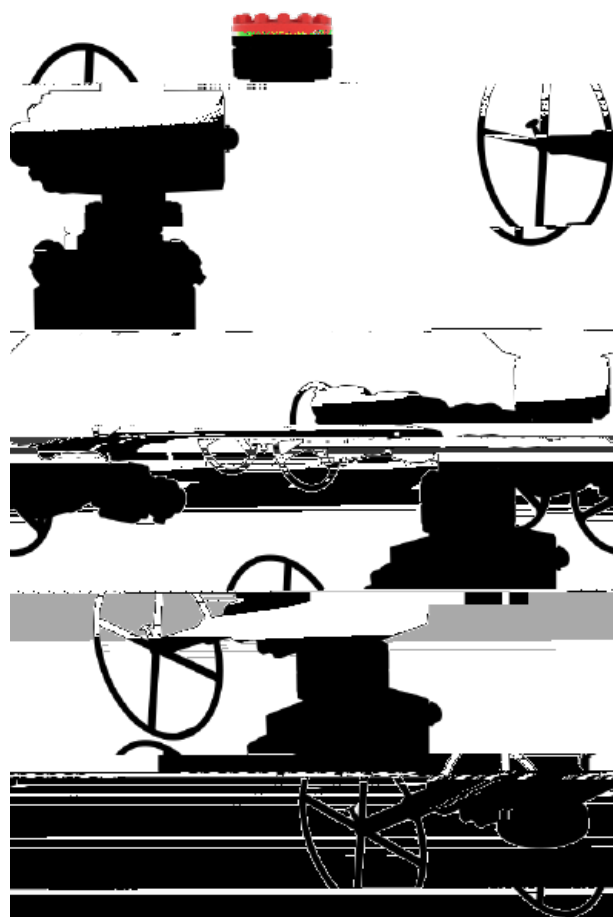

Maximum diameter of 7-1/16

Maximum pressure of 15,000 psi

Fracturing head designed with compact structure, small size and light weight for easy installation