


# SHENKAI

## Reference standards: API 16A,GB/T 20174

Product Applicability: It is applicable to Northeast and in Jiang of China and Russia which environment is extremely cold

### Product Features

- The BOP Stack should be insulated against freezing to maintain good sealing performance of all seals in the BOP
- Blowout preventer have pipeline internally, except steam inlet device no additional equipment, easy to operate
- Steam conduct heat directly to the BOP internal, heat conduction and heat radiation

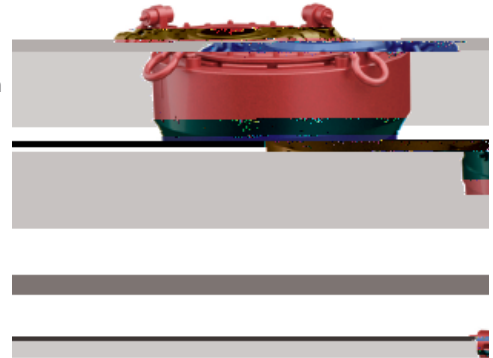

°C

Lowest applicable temperature

Rated Pressure Class

Sulfur resistance class

### 技 参数

|  |                                 |
|--|---------------------------------|
| Nominal diameter                                   | 179.4-679.5mm (7 1/16"-26 3/4") |
| Rated working pressure: ram preventer              | 13.8-138Mpa (2000-20000psi)     |
| Rated working pressure of hydraulic control system | 20.7Mpa (3000psi)               |
| Recommended operating pressure                     | 10.35MPa (1500psi)              |
| Metal material temperature grade                   | T-75/250                        |
| Sulfur resistance level                            | NACE MR0175                     |
| Performance Level                                  | PR2                             |